


CENTRAL VACUUM POWER UNIT MODEL CV400

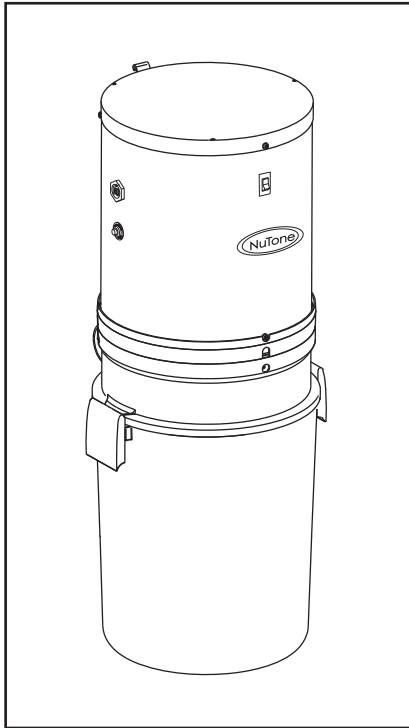

SPECIFICATIONS

Motor	1-Stage
Horsepower	1.74 @ Full Open Orifice
Ampere	8.5
Voltage	120 VAC
Airflow at 2" (50.8 mm) opening	.100 CFM (47.2 L/s)
Water Lift	.90" (2.3 m)
Air Watts	400
Switch on Power Unit	Yes
Recommended Circuit	15 Amp
Primary Filtration	Disposable Bag
Capacity	.6 U.S. Gallons (22.7 Litres)
Secondary Filtration	Mesh
cULus Listed	Yes
Housing	White metal housing with polymeric debris pail
Power Unit Dimensions	∅ 11" x 30" H

Designed for smaller homes up to 2,200 square feet (204 m²), this power unit features a 1-stage motor that delivers 400 air watts of power. A great solution for the budget minded consumer.

FEATURES

- Integrated muffler for quiet operation
- Wall-mount bracket for simple, safe, and secure mounting
- Left and right intake ports for easy installation
- Oversized debris pail handles made for a quick and easy pail removal

- Large 6 U.S. gallons (22.7 litres) easy-clean, corrosion resistant debris pail that typically needs emptying only every 6 months
- Disposable bag for easy maintenance
- Six foot (1.8 m) long power cord
- cULus Listed
- 2-Year Warranty



Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 888-336-3948

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date